arXiv:physics/0510216v1 [physics.data-an] 25 Oct 2005

Comment on *The origin of bursts and heavy tails in human dynamics*

In a recent letter, Barabási claims that the dynamics of a number of human activities are scale-free [1]. He specifically reports that the probability distribution of time intervals τ between consecutive e-mails sent by a single user and time delays for e-mail replies follow a power-law, $P(\tau) \approx \tau^{-\alpha}$ with $\alpha \simeq 1$, and proposes a priority-queuing process as an explanation of the "bursty" nature of human activity. Here, we quantitatively demonstrate that the reported power-law distributions are solely an artifact of the analysis of the empirical data and that the proposed model is not representative of e-mail communication patterns.

Barabási analyzed the email communication patterns of a subset of users [2] in a database containing the email usage records of 3188 individuals using a university e-mail server over an 83-day period [3]. Upon examining the same data, we find a number of significant deficiencies in his analysis. These deficiencies were communicated to Barabási well in advance of publication [4]. For example, even though the data have a resolution of one second, the statistical analysis reported in Fig. 2 of Ref. [1] indicates that the most frequent time interval between consecutive e-mails sent by the same user occurs for time intervals *smaller* than one second. Even more surprisingly, the user considered in Fig. 2 of Ref. [1] appears to respond to e-mails most frequently for times smaller than five seconds. We verified that such time intervals are too short to permit a person to write and send consecutive e-mails, much less read, write, and reply to an e-mail.

Unfortunately, these are not the only problems with the claims of Ref. [1]. Barabási claims that the time series of the typical user is well-described by a power-law distribution with an exponent $\alpha \simeq 1$. This claim is revised in more recent work, which suggests that the power-law is modified by an exponential truncation [5, 6]. Our own analysis of the same empirical data used in Ref. [1] suggests that a log-normal distribution provides a significantly better description of the data.

Our hypothesis of a log-normal distribution may also be more appropriate for describing the activity of users that rely on e-mail for daily communication for the following reasons. To our knowledge, there are no studies reporting that a real-world process is well-described by a power-law with an exponent $\alpha \simeq 1$. An *apparent* scaling exponent $\alpha \simeq 1$ and concave curvature depicted in Fig. 2A of Ref. [1] and numerous figures of Ref. [6] are, however, characteristics of a log-normal distribution, which are representative of many real-world processes [7]. Log-normal distributions

are easily identifiable by examining the probability density of $s = \ln(\tau)$. Under this transformation, a power-law with exponent $\alpha \simeq 1$ would be a uniform distribution of s. It is visually apparent that $P(s)$ is not uniform, but rather Gaussian in form (see *Supplementary Information*). The Gaussian form of this distribution suggests that users send consecutive e-mails with a characteristic time ($\tau \approx 45$ minutes for the user in Fig. 1) as opposed to Barabási's contention that users send e-mails without a characteristic scale.

We conduct a Bayesian model selection analysis to decide between the two proposed descriptions of the data [8, 9]. As in Ref. [1], we analyze both the time intervals between consecutive e-mails sent and the time required to reply to an e-mail. To be as considerate as possible with the analysis of Ref. [1], we assume prior probabilities of 90% for the truncated power-law model and 10% for the log-normal model. A more stringent comparison would give each model equal likelihood of describing the data in the absence of additional information. Furthermore, we restrict the time domain for our analysis of the power-law whereas we consider the *entire* time domain for our analysis of the log-normal distribution. We find that the posterior probability of the log-normal description being correct is *indistinguishable from one* within the computer's numerical precision.

Additionally, we calculate posterior probabilities as a function of the magnitude of the power-law domain. As we show in Fig. 1, the log-normal distribution provides a better description of the data than a power-law except when less than one order of magnitude is considered for the analysis of the power-law (see Fig. 1 and the *Supplementary Information* for full details of this analysis).

We next discuss the priority-queuing model which reportedly explains the mechanism behind the reply times in e-mail communication. Before addressing the details of the model, however, we would like to emphasize that the model predicts a power-law for the distribution of response time delays, *not* the empirically observed log-normal distribution. These predictions of the model are supported by recent analytical work by Vázquez et al. [5, 6]. As we demonstrate above, that prediction is *not* supported by the data.

The priority-queuing model is not only unrealistic in its prediction of the functional form of the distribution of time delays for e-mail responses. After an initial transient period, new tasks in the model are typically executed immediately after arrival, resulting in a pronounced peak at $\tau = 1$; these tasks are said to represent e-mails which are either immediately replied to or deleted [1]. In the case that reportedly best captures human dynamics [1], that is, when $\epsilon \to 0$, where ϵ is the probability of executing a randomly-selected task instead of the highest-priority task, this peak contains 99.9% of the tasks handled by the user—an unrealistic scenario. Moreover, upon reaching

steady state, the distribution of task priorities on the queue converges to a uniform distribution in the interval $[0, \epsilon]$. The model thus predicts that the typical e-mail user has a queue filled with *extremely* low priority tasks and consequently performs all new incoming tasks immediately upon arrival. This situation is also not representative of *typical* human behavior.

E-mail communication patterns are a valuable proxy for the study of human behavior and decision-making. The idea of humans relying solely on a priority-queuing procedure [10] to manage their complex activity is interesting. Unfortunately, we find that even though Ref. [1] is quite stimulating, *none* of the results it reports hold upon further inspection.

Daniel B. Stouffer, R. Dean Malmgren, Luís A. Nunes Amaral
Department of Chemical and Biological Engineering, Northwestern University,
Evanston, IL 60201, USA

[1] A.-L. Barabási, Nature **435**, 207 (2005).

[2] A.-L. Barabási, Private communication to L. A. N. Amaral. (June 2005).

[3] J.-P. Eckmann, E. Moses, and D. Sergi, Proc. Natl. Acad. Sci. USA **101**, 14333 (2004).

[4] L. A. N. Amaral, Private communication to A.-L. Barabási. (February 2005).

[5] A. Vázquez, arXiv:physics/0506126 (2005).

[6] A. Vázquez, J. G. Oliveira, Z. Dezsõ, K.-I. Goh, I. Kondor, and A.-L. Barabási, arXiv:physics/0510117 (2005).

[7] M. Mitzenmacher, Internet Mathematics **1**, 226 (2004).

[8] A. M. Mood, F. A. Graybill, and D. C. Boes, *Introduction to the Theory of Statistics* (McGraw-Hill Companies, 1974).

[9] J. M. Bernardo and A. F. M. Smith, *Bayesian Theory* (John Wiley & Sons, 2000).

[10] D. Gross and C. M. Harris, *Fundamentals of Queuing Theory* (Wiley, New York, NY, 1998).

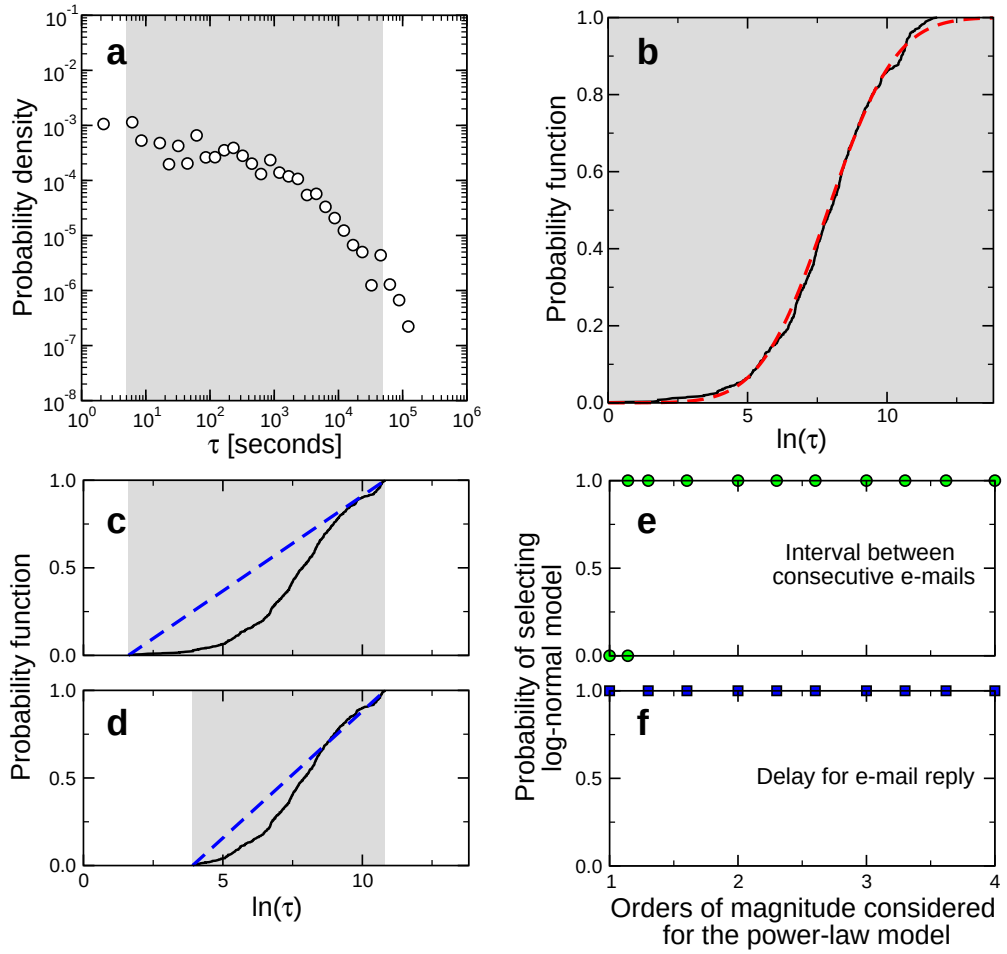

FIG. 1: Bayesian model selection protocol for comparing the power-law with exponent $\alpha = 1$ and the log-normal models. **a**, Probability density of the time intervals τ between consecutive e-mails sent for a user who sent approximately 8 e-mails per day during the study period [3]. The region shaded in grey $\tau \in [5, 50000]$ corresponds to the range reported in [1, 5, 6] to be well-approximated by a power-law with exponent $\alpha = 1$. **b**, To investigate the validity of the log-normal hypothesis, we take advantage of the fact that the probability function $P(s)$ of the logarithm of the time interval $s = \ln(\tau)$ should be Gaussian. It is visually apparent that the probability function for the user considered in **a** (black curve) is well-described by a Gaussian (dashed red curve). **c**, To investigate the validity of the power-law with an exponent $\alpha = 1$, we can perform a similar transformation and analysis. If the data found in the grey shaded region of **a** were well-described by a power-law with exponent $\alpha = 1$, the $P(s)$ would be linear with slope $(s_{max} - s_{min})^{-1}$. It is visually apparent that the probability function for the data in the range $\ln(5) \leq s \leq \ln(50000)$ is *not* linear. **d**, Even when the considered data range is reduced one order of magnitude to $\ln(50) \leq s \leq \ln(50000)$ the data are *still* not linear. **e**, We conduct Bayesian model selection analysis between the two candidate models for all 1202 users who sent more than 10 messages during the study period [3]. When considering the time interval between consecutive emails, we find that one would effectively always select the log-normal model over the power-law model, except when the power-law model is used for *one order of magnitude or less* in the time domain. **f**, We perform a similar analysis for all 760 users who reply to at least 10 messages during the study period [3]. When considering the time delay for e-mail replies, we find that one would always select the log-normal model over the power-law model, even when considering *just one order of magnitude* of the data. It is critical to note that in the analysis of both **e** and **f** we consider *all* user data for the log-normal model in contrast to the reduced range considered for the power-law model.